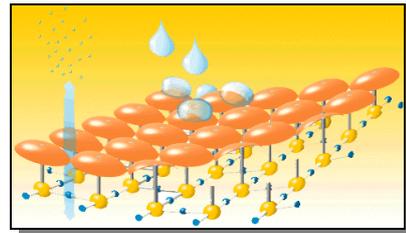

DeepSeal 50*

A HIGH PERFORMANCE CONCRETE SEALER

Requirement: To protect against penetration of water and staining materials through concrete, Masonry blocks earthen bricks or Architectural pavers, while enhancing the natural colours of the materials being coated. This inturn affords a Long- term protection against environmental impacts that cause degradation in exposed conditions

How to specify: All exposed surfaces (specify areas and masonry type) shall be protected by a 2 coat application o f **DeepSeal 50**. With the rate of application for most surfaces 1lt =4-7m2, all surfaces to be clean and dry concrete to be 14days of age before application.



Effect: As **DeepSeal 50** is a unique combination of Silanes / Siloxane and Acrylic liquids. Surfaces treated are not only water repellent but also sealed against penetration of rainwater under wind pressure and against most other staining materials such as motor oils, red wine and mild food acids. **DeepSeal 50** highlights the natural colour of masonry but does not produce a glazed finish. However over application will produce a “wetted” effect and a subdued glaze to the surface.

Recommended: All natural unpainted masonry and pressed clay surfaces.