PROOF NO. 4 210814

KNOW-HOW | concrete technologies

ABN 15 086 008 068 - BSA 713 740

Unit 1/708 Boundary Rd, Coopers Plains Ph: 61-7-3274 1000
PO Box 775 Archerfield Qld 4108 Fax 61-7-3274 1006
www.knowhowconcrete.com.au

Deep Seal Natural 'W'

- Seal & protect your pavers from stains and corrosion
- Water based clear sealer
- Penetrative sealer
- Easy to use
- Surfaces easier to clean once sealed
- Low VOC
- U V Stable
- Coverage rate 6 – 8 m^2 per Litre
- Available in 5 Litre and 20 Litre containers

STEP 1

Make sure the concrete area is clean and free of dirt, oil and grease or any loose material.

BEFORE

AFTER

Leave area to dry.

We always suggest you do a little trial sample, to make sure you are happy.

STEP 2

Make sure you have your equipment ready, roller, paint brush, drop cloth mixing bucket etc.



Before Applying DeepSeal Natural 'W', make sure you give the material a good stir.

Never apply sealer in the heat of the day, best time to apply is in the morning.

STEP 3

Apply 1st coat of DeepSeal Natural 'W' with a medium nap roller (ie hair length approx 15mm), Paint brush or low pressure spray depending on your surface area;

In an even coverage over cleaned concrete surface or pavers @ Approx. 1Lt per 6-8m2.

Apply 2nd coat of DeepSeal Natural 'W' over 1st coat, this can be done almost immediately after completing the 1st coat. Being a penetrative sealer the sealer absorbs into the surface, if any is pooling on the area after 20 minutes, wipe up the excess.

STEP 4

Leave to dry, your concrete/pavers are now protected against stains such as leaves and dirt; and protected against efflorescence.

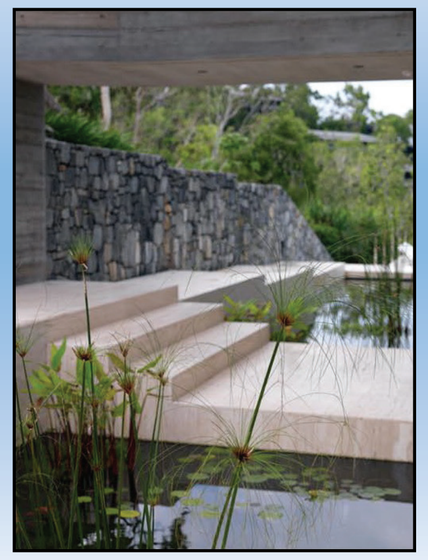

Please contact us for further information if required.